

No. of Printed Pages : 5

MMTE-002

**M. SC. (MATHEMATICS WITH
APPLICATIONS IN COMPUTER
SCIENCE) [M. SC. (MACS)]**

Term-End Examination

June, 2025

**MMTE-002 : DESIGN AND ANALYSIS OF
ALGORITHMS**

Time : 2 Hours

Maximum Marks : 50

Note: Attempt any *four* questions from question
nos. 1 to 6. Question No. 7 is compulsory.

-
-
1. (a) Sort the following numbers using the
merge sort algorithm, showing all the
steps you use in the process : 5

15, 32, 88, 70, 60, 23, 78, 25, 42, 37

C-2714/MMTE-002

P. T. O.


- (b) Construct a (2, 4) B-tree by inserting the following numbers in the order given. Show all the steps you have used in the process : 5

4, 1, 3, 2, 8, 7, 9, 6, 5, 11


2. (a) Construct a Huffman code for the following data, showing all the steps : 5

Character	A	B	C	D	E
Probability	0.4	0.1	0.2	0.15	0.15

- (b) Find the minimum spanning tree of the following graph using Prim's algorithm, explaining all the steps : 5

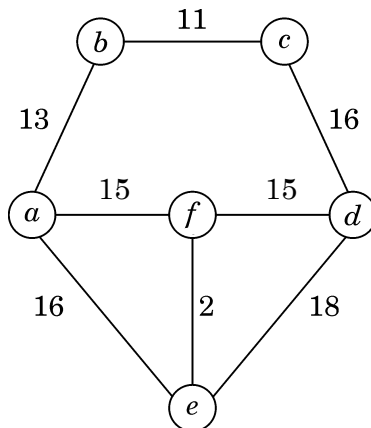

3. (a) Find the longest common subsequence of the sequences $X = \langle B, C, D, C, E, B, C \rangle$ and $Y = \langle C, E, D, B, C, B \rangle$ using dynamic programming, showing all the steps. 5
- (b) Using Dijkstra's algorithm, find the distances of all the vertices from 'a', in the weighted graph given below : 5



4. (a) Show the steps in the dynamic programming algorithm to find an optimal parenthesization of a matrix-chain product whose sequence of dimensions is as follows : 5

Matrix	Dimension
A_1	5×10
A_2	10×3
A_3	3×12
A_4	12×5

- (b) Give examples of the following : $2.5 \times 2 = 5$
- A problem for which the dynamic programming technique outperforms Greedy approach.
 - A problem for which Greedy approach outperforms dynamic programming technique.
5. (a) Write the pseudo code for Bubble sort.
Derive its running time. 5
- (b) Write an algorithm to delete an internal node from a binary search tree. 5
6. (a) Find a general solution to the recurrence $a_n = 3a_{n-1} - 4a_{n-3}$, $n \geq 1$. Find the solution, given the initial conditions $a_1 = 1$, $a_2 = 1$, $a_3 = 1$. 6

- (b) Consider the given orders of a binary tree :

Postorder : D, H, E, B, F, G, C, A

Preorder : A, B, D, E, H, C, F, G

Construct the equivalent binary tree.

Demonstrate all the steps involved. 4

7. Which of the following statements are true and which are false ? Justify your answer with a short proof or a counter-example :

$$5 \times 2 = 10$$

- (a) The worst case running time for the quick sort algorithm is $O(n \log n)$.
- (b) The min-heap is a binary search tree.
- (c) The minimum spanning tree of any graph is unique.
- (d) $n! = O(n^n)$
- (e) Every NP-complete problem is also a NP-hard problem.

x x x x x